

Fri 11/22 - Mon 11/26


The shape of an ideal arch (see slides on Canvas)

What is an ideal arch?

- Three conditions:
- ① The only load on the arch is its weight
  - ② The only external support is at its base
  - ③ Gravitational forces on the arch are balanced perfectly by its reaction to the compression that these forces generate.

Another answer, due to Robert Hooke (1671): "hanging chain, upside-down"


Imagine a weightless fishing line that has weights strung along it.

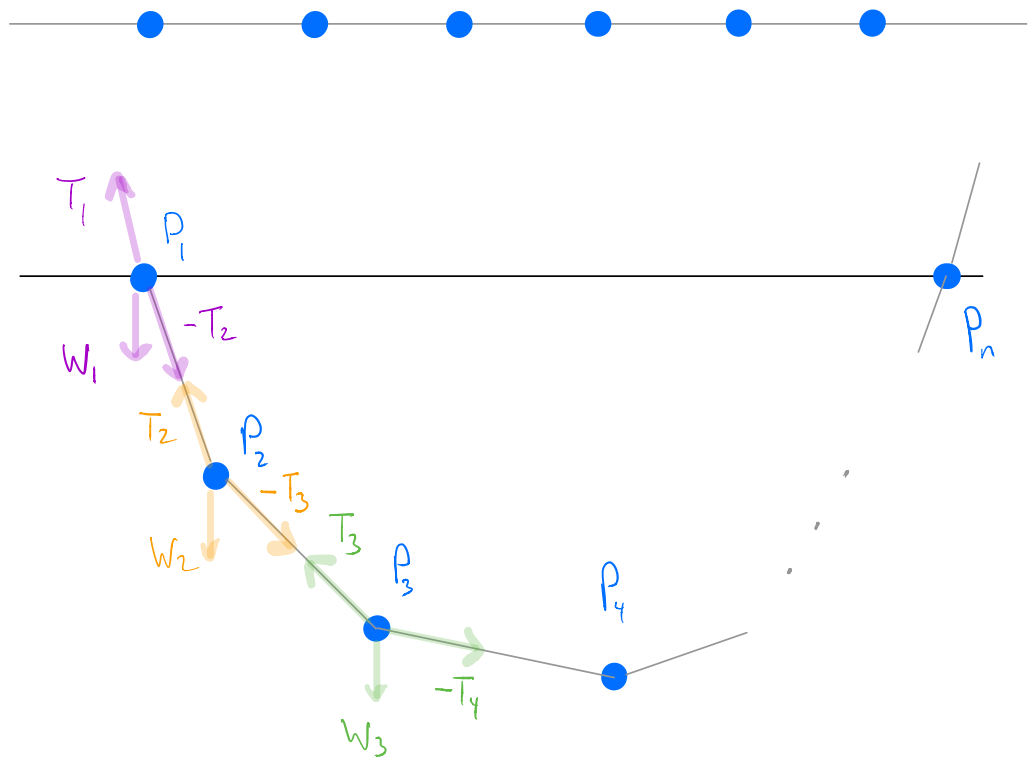

②

★ Forces must balance if the string is at rest.

At each weight:

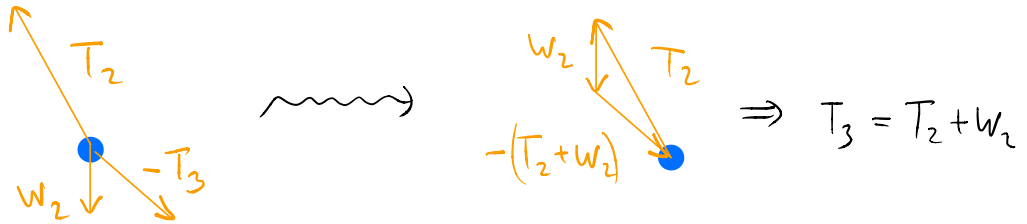


Thus, we get a system of equations that must hold:

$$\begin{cases} T_1 + W_1 = T_2 \\ T_2 + W_2 = T_3 \\ T_3 + W_3 = T_4 \\ \vdots \\ T_n + W_n = T_{n+1} \end{cases} \dots \text{which is not fun to solve.}$$

As usual, the "Calculus version" of this problem is less messy (later).

If we turn a chain upside-down, we get an arch.

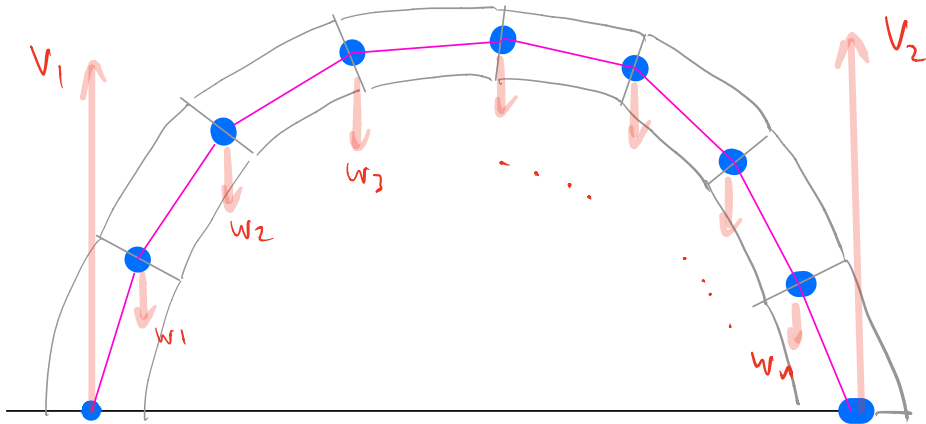


Stability  $\Rightarrow W_1 + W_2 + \dots + W_n = V_1 + V_2$

Safe theorem (Heyman, 1966): "As long as there is any polygonal path inside the arch such that the forces balance, then the arch is stable." 3


It turns out that the shape of an ideal arch, or hanging chain (i.e., take  $\lim_{n \rightarrow \infty}$  in the previous examples) is a

hyperbolic cosine function,  $A \cosh(Bx) = A \left( \frac{e^{Bx} + e^{-Bx}}{2} \right)$ ,  $AB=1$ .

Def: Hyperbolic cosine

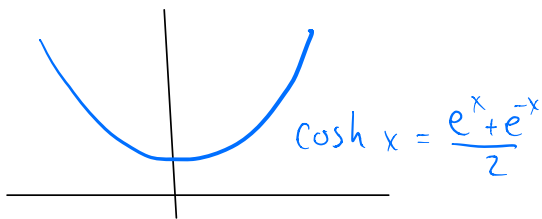

Hyperbolic sine

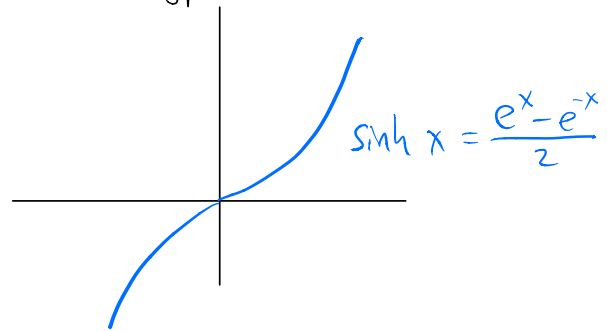


Tues 11/27

Let's explore this further...


Polygonal approximations of functions. (Topic from the end of Calculus 2)

Motivating example: Let's approximate  $f(x) = e^x$  at  $x=0$ .

- 0<sup>th</sup> order approximation:  $T_0(x) = 1$   
(y-intercept)

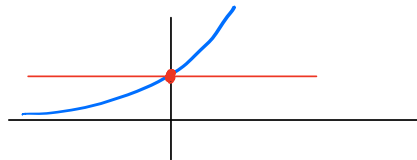


- 1<sup>st</sup> order approximation:  $T_1(x) = 1+x$   
(We've done a lot of these...)

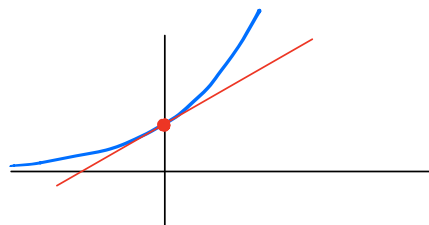

• 2<sup>nd</sup> order approximation:

$$T_2(x) = 1 + x + \frac{1}{2}x^2$$

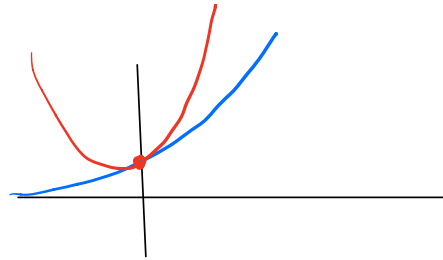

(3)

And so on...

• n<sup>th</sup> order approximation:  $T_n(x) = a_0 + a_1x + a_2x^2 + \dots + a_nx^n$

Taking the limit as  $n \rightarrow \infty$  yields an infinite series:

$$e^x = a_0 + a_1x + a_2x^2 + a_3x^3 + a_4x^4 + \dots$$

★ How to find  $a_n$ ?

Note that  $T_n(0) = a_0 = e^0 = 1$

$T_n'(0) = a_1 = e^0 = 1$  since  $\frac{d}{dx} e^x = e^x$

$T_n''(0) = 2a_2 = e^0 = 1$  since  $\frac{d^2}{dx^2} e^x = e^x$

$T_n'''(0) = 6a_3 = e^0 = 1$

⋮

$T_n^{(k)}(0) = k! a_k = e^0 = 1$

Thus, the coefficient of  $x^k$  is  $a_k = \frac{1}{k!}$

That is,  $e^x = 1 + x + \frac{1}{2!}x^2 + \frac{1}{3!}x^3 + \frac{1}{4!}x^4 + \frac{1}{5!}x^5 + \frac{1}{6!}x^6 + \frac{1}{7!}x^7 + \frac{1}{8!}x^8 + \dots$

Therefore:  $e^{-x} = 1 - x + \frac{1}{2!}x^2 - \frac{1}{3!}x^3 + \frac{1}{4!}x^4 - \frac{1}{5!}x^5 + \frac{1}{6!}x^6 - \frac{1}{7!}x^7 + \frac{1}{8!}x^8 + \dots$

Add these!  $\frac{e^x + e^{-x}}{2} = 1 + \frac{1}{2!}x^2 + \frac{1}{4!}x^4 + \frac{1}{6!}x^6 + \frac{1}{8!}x^8 = \cosh x$

Subtract these!  $\frac{e^x - e^{-x}}{2} = x + \frac{1}{3!}x^3 + \frac{1}{5!}x^5 + \frac{1}{7!}x^7 = \sinh x$


- Remarks
- $e^x = \cosh x + \sinh x$
  - $\frac{d}{dx}(\sinh x) = \cosh x$ ,  $\frac{d}{dx}(\cosh x) = \sinh x$
  - If  $i = \sqrt{-1}$ , then  $i^2 = -1$ ,  $i^3 = -i$ ,  $i^4 = 1$ ,  $i^5 = i$ , ...


$$e^{ix} = 1 + ix - \frac{x^2}{2!} - \frac{i x^3}{3!} + \frac{x^4}{4!} + \frac{i x^5}{5!} - \frac{x^6}{6!} - \frac{i x^7}{7!} + \frac{x^8}{8!} + \dots$$

$$e^{-ix} = 1 - ix - \frac{x^2}{2!} + \frac{i x^3}{3!} + \frac{x^4}{4!} - \frac{i x^5}{5!} - \frac{x^6}{6!} + \frac{i x^7}{7!} + \frac{x^8}{8!} + \dots$$


$$\frac{e^{ix} + e^{-ix}}{2} = 1 - \frac{x^2}{2!} + \frac{x^4}{4!} - \frac{x^6}{6!} + \frac{x^8}{8!} + \dots = \cos x$$

$$\frac{e^{ix} - e^{-ix}}{2i} = x - \frac{x^3}{3!} + \frac{x^5}{5!} - \frac{x^7}{7!} + \dots = \sin x$$

- Remarks:
- $e^{ix} = \cos x + i \sin x$
  - $e^{i\pi} = \cos \pi + i \sin \pi$
- $\Rightarrow e^{i\pi} = -1$  

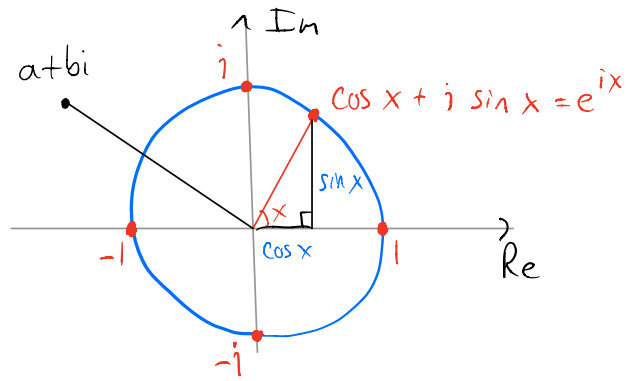


Mon 12/2

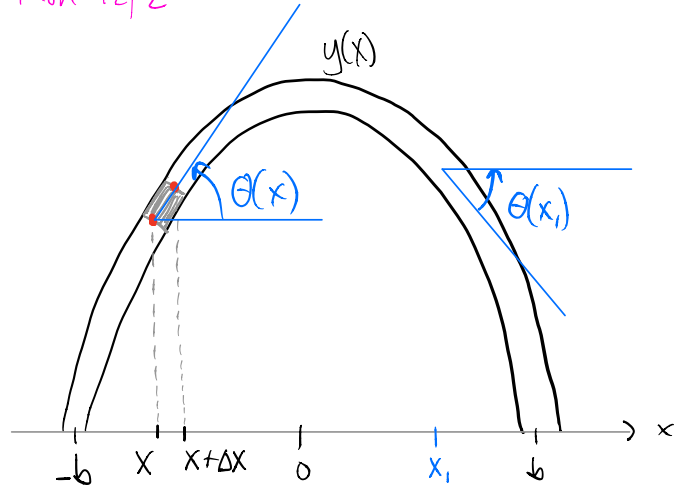

Consider an ideal arch.  
 Let  $C(x)$  = Compression force at  $x$   
 $\theta(x)$  = angle at  $x$   
 $y(x)$  = graph of the function of the arch.

6

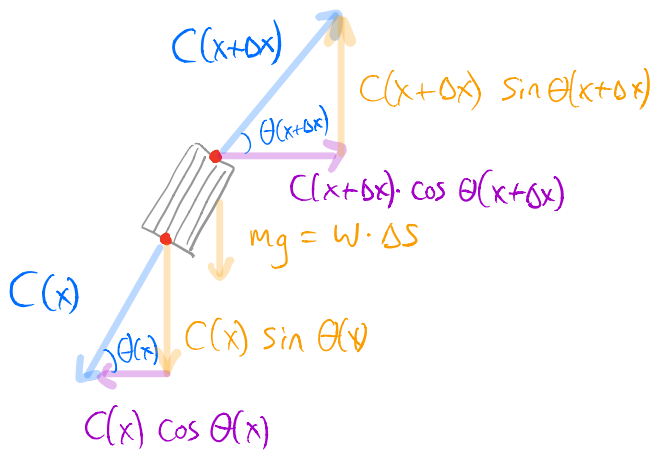

\* Need to balance horizontal & vertical forces.

Balance horizontal forces

$$C(x+\Delta x) \cdot \cos \theta(x+\Delta x) - C(x) \cos \theta(x) \approx 0$$

$$\lim_{\Delta x \rightarrow 0} \frac{C(x+\Delta x) \cdot \cos \theta(x+\Delta x) - C(x) \cos \theta(x)}{\Delta x} \approx 0$$

take limit of both sides

$$\int_{-b}^x \frac{d}{dx} C(x) \cos \theta(x) dx = \int_{-b}^x 0 dx$$

integrate both sides


$$(\star) \quad C(x) \cos \theta(x) = C_0$$

$C_0 =$  unknown constant

Remark: If we plug in  $x=0$ , we get  $C(0) \underbrace{\cos \theta(0)}_{=1} = C_0$

Thus  $C_0 = C(0) =$  compression force at top of arch.

Balance vertical forces



$$\begin{aligned} C(x+\Delta x) \sin \theta(x+\Delta x) - C(x) \sin \theta(x) &\approx -w \cdot \boxed{\Delta s} \rightarrow \sqrt{(\Delta x)^2 + (\Delta y)^2} \cdot \sqrt{\frac{(\Delta x)^2}{(\Delta x)^2}} \\ &= \sqrt{1 + \left(\frac{\Delta y}{\Delta x}\right)^2} \cdot \Delta x \\ &= \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx \text{ as } \Delta x \rightarrow 0 \end{aligned}$$

7

$$\lim_{\Delta x \rightarrow 0} \frac{C(x+\Delta x) \sin \theta(x+\Delta x) - C(x) \sin \theta(x)}{\Delta x} \approx -w \sqrt{1 + \left(\frac{dy}{dx}\right)^2}$$

take limit of both sides


$$\int_{-b}^x \frac{d}{dx} C(x) \sin \theta(x) dx = -w \int_{-b}^x \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx$$

$$(\star\star) \quad C(x) \sin \theta(x) = -w \int_{-b}^x \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx$$

length of arch from  $-b$  to  $x$

Now, what do we do with  $(\star)$  and  $(\star\star)$ ?

Consider  $\tan \theta(x)$ : there are two ways to compute it.



$$\textcircled{2} \quad \frac{(\star\star)}{(\star)} = \frac{C(x) \sin \theta(x)}{C(x) \cos \theta(x)}$$

$$\tan \theta(x) = \frac{dy}{dx}$$

$$= -\frac{w}{C_0} \int_{-b}^x \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx$$

Thus, the function  $y(x)$  that describes the arch satisfies

$$\frac{dy}{dx} = -\frac{w}{C_0} \int_{-b}^x \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx$$

This is an example of a differential equation: an equation that defines  $y(x)$  implicitly, but not explicitly.

8

wed 12/4

$$\frac{d}{dx} \left( \frac{dy}{dx} \right) = \frac{d}{dx} \left[ -\frac{w}{C_0} \int_{-b}^x \sqrt{1 + \left( \frac{dy}{dx} \right)^2} dx \right]$$

$$(*) \quad \boxed{\frac{d^2y}{dx^2} = -\frac{w}{C_0} \sqrt{1 + \left( \frac{dy}{dx} \right)^2}} \quad \text{by Fund. Thm. Calc.}$$


Aside: Differential equations come up in science & engineering.

Ex: "Rate of change of an investment is proportional to its value"

$$y' = k y$$

e.g., 5% interest rate:  $y' = 0.05 y$

This has soln  $y(t) = C e^{0.05t}$  "exponential growth"




Another example:

"Rate of change of temp. of coffee is proportional to difference b/w room temp"

$$T' = k (72^\circ - T)$$

$T' = k(72 - T)$  has soln  $T(t) = 72 + C e^{-kt}$



Back to solving (\*).

Claim:  $y(x) = -\frac{C_0}{w} \cosh\left(\frac{w}{C_0} x\right) + D$  works.

Recall:  $\cosh kx = \frac{e^{kx} + e^{-kx}}{2}$ ,  $\sinh kx = \frac{e^{kx} - e^{-kx}}{2}$

$$(\cosh kx)^2 = \frac{1}{4} (e^{2kx} + 2 + e^{-2kx}), \quad (\sinh kx)^2 = \frac{1}{4} (e^{2kx} - 2 + e^{-2kx})$$



$$(\cosh kx)^2 - (\sinh kx)^2 = 1$$

9

$$\text{Also } \frac{d}{dx} \cosh kx = \sinh kx \quad \text{and} \quad \frac{d}{dx} \sinh kx = \cosh kx$$

$$\text{So } \frac{dy}{dx} = -\sinh\left(\frac{w}{c_0} x\right)$$

$$\frac{d^2y}{dx^2} = -\frac{w}{c_0} \cosh\left(\frac{w}{c_0} x\right) \leftarrow \text{LHS (need to show this is = RHS)}$$

$$\begin{aligned} \text{RHS: } -\frac{w}{c_0} \sqrt{1 + \left(\frac{dy}{dx}\right)^2} &= -\frac{w}{c_0} \sqrt{1 + \left(\sinh \frac{w}{c_0} x\right)^2} = -\frac{w}{c_0} \sqrt{\cosh^2 \frac{w}{c_0} x} \\ &= -\frac{w}{c_0} \cosh\left(\frac{w}{c_0} x\right) \quad \checkmark \end{aligned}$$

Next: If  $h$  is the max height of an arch, then

$$y(0) = -\frac{w}{c_0} \underbrace{\cosh 0}_{=1} + D = -\frac{w}{c_0} + D = h \Rightarrow \boxed{D = h + \frac{w}{c_0}}$$

$$\text{Thus the final solution is } \boxed{y(x) = -\frac{c_0}{w} \cosh\left(\frac{w}{c_0} x\right) + \left(h + \frac{w}{c_0}\right)}$$

In general, the shape of an ideal arch is  $y(x) = A \cosh\left(\frac{x}{A}\right) + D$ .

Now, back to the St. Louis Arch... (see Canvas slides).